


"V" Groove Track System

"V" Groove Track System is our standard track. It is a floor mounted track with the ability to be installed on a variety of different surfaces. The low profile design and the tapered sides eliminates tripping hazards and makes it easy for carts and other equipment to be moved in and out of the aisle. The installation of the tracks is very easy with minimal anchoring. The "V" Groove track is ADA compliant and is available with our built-in In-Track Anti-Tip safety feature.




Adjustable Standard Manual "V" Groove Track is just over 3-1/4" wide, less than 7/16" at its highest point and is made from heat treated aluminum. This adjustable track has set screws which allow for a 1/4" of leveling if needed and is available with flat or carpet "grabbing" underlayment. This track can be used with the standard manual carriage.

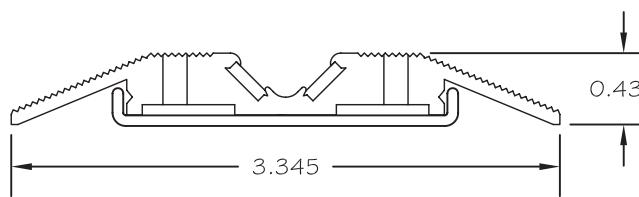

Non-Adjustable Heavy Duty Manual "V" Groove Track is less than 2-3/4" wide, 1/2" at its highest point and is made from heat treated aluminum. There is no adjustability within the track for this style but this track can be leveled through shimming. This track can be used with the standard manual carriage, provides a price competitive heavy duty track option. The Non-Adjustable Heavy Duty Manual "V" Groove Track is compatible with all In-Track Anti-Tip Tracks.

NOTE: Depending on the application there are other variations available. They include a solid aluminum track or flat edged track for decking.

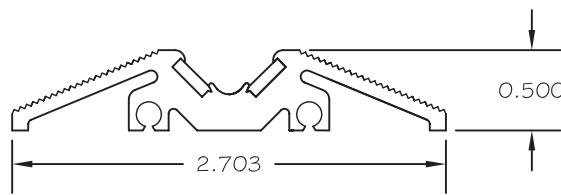


Flat Track System


Flat Track System is an alternative to our standard "V" Groove track. The Flat Track maintains the standard features of our "V" Groove track and incorporates the same ease of installation. The Flat Track is manufactured with a low profile and tapered sides eliminating tripping hazards and making it easy for carts and other equipment to be moved in and out of the aisle. The Flat Track is ADA compliant and is available with our built-in In-Track Anti-Tip safety feature.



Standard Flat Track is 2-1/4" wide, 3/8" at its highest point and is made from heat treated aluminum. It has a flat steel insert that is 5/8" wide in place of the "V" groove. This will reduce debris in the track. There is no adjustability within the track for this style but this track can be leveled through shimming. This track can be used with the standard flat track carriage.

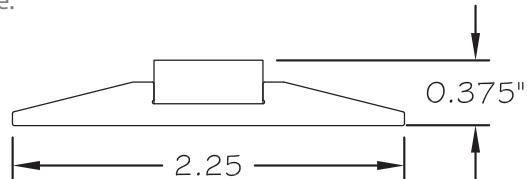

Heavy Duty Flat Track is less than 3-1/4" wide, 1/2" at its highest point and is made from aluminum. It has a flat steel insert that is 3/4" wide. This track will eliminate debris in the groove. There is no adjustability within the track for this style but this track can be leveled through shimming. This track can be used with the heavy duty flat track carriage and the mechanical-assist carriage.

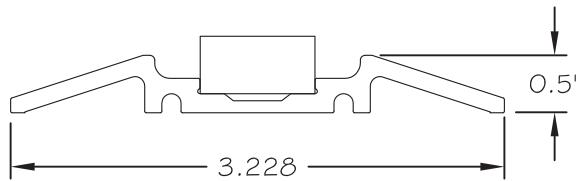

Decked ITAT Flat Track overall is 4-5/8" wide and 1-5/16" high. When installed, only 1/8" of the 7/8" X 3/4" steel insert is above the decking. This track is primarily used when specifications require a levelable track. This track was designed with high grade engineered composite decking in mind. This will provide a completely "finished" look to the overall system. The track is ideal for heavy duty carriages like mechanical-assist and electric carriages.

